

# MINQIANG

## TYRE CATALOGUE

KEERUN TIRE CO., LTD.

This version is applied for BACH HO PCS., LTD; VIETNAM only



KEERUN TIRE (DEZHOU) CO., LTD  
NO.399, NORTH KAIYUAN WEAT AVENUE, LELING CITY,  
DEZHOU CITY, SHANDONG PROVINCE, CHINA North

KEERUN TIRE (RIZHAO) CO., LTD  
GAOZE TOWN, WULIAN COUNTY, RIZHAO CITY,  
SHANDONG PROVINCE, CHINA

<https://www.keeruntire.net>



With special design and compound for only  
use of trailer or semi-trailer.

All these tyres in these catalogue cannot be  
used for lorries truck and buses.



## MS992




SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low heat super anti-wear formula



Excellent water evacuation performance



Good fatigue resistance



Ultra-high strength stiffness steel belt structure

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	18.0	9.00	3550/3250	152/149	L	930

\*This product cannot be used for lorries truck and buses.



## MS968 / MS968X



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low heat super anti-wear formula



Excellent water evacuation performance



Good fatigue resistance



Irregular wear resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	17.0	9.00	3550/3250	152/149	L	930

\*This product cannot be used for lorries truck and buses.



## MT988 / MT988X

SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low heat super anti-wear formula



Excellent water evacuation performance



Evenly distributes grounding pressure, low heat generation


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	15.5	9.00	3550/3250	152/149	L	930

\*This product cannot be used for lorries truck and buses.



## MA966

SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance formula design



Excellent water evacuation performance



Evenly distributes grounding pressure, irregular wear resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
275/80R22.5	18PR	15.0	8.25	3250/3000	149/146	L	900


\*This product cannot be used for lorries truck and buses.



## MT966



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance  
formula design



Excellent water evacuation  
performance



Evenly distributes grounding  
pressure, irregular wear  
resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	15.5	8.25	3000/2725	146/143	M	830
11R22.5	18PR	15.5	8.25	3250/3000	149/146	L	930
11R24.5	16PR	15.5	8.25	3250/3000	149/146	L	830
12R22.5	18PR	16.5	9.00	3550/3250	152/149	L	930
215/75R17.5	16PR	12.0	6.00	1750/1600	127/124	L	830
225/80R17.5	18PR	13.0	6.75	1550/1500	123/122	L	700
235/75R17.5	16PR	13.0	6.75	2000/1850	132/129	L	830
245/70R19.5	16PR	14.0	7.50	2180/2060	135/133	L	830
255/70R22.5	16PR	13.0	7.50	2500/2300	140/137	L	830
265/70R19.5	16PR	14.0	7.50	2500/2360	140/138	L	775
265/70R22.5	18PR	14.0	7.50	2725/2575	143/141	J	850
275/70R22.5	18PR	15.0	8.25	3000/2725	146/143	L	900
275/80R22.5	18PR	15.0	8.25	3250/3000	149/146	L	900
295/60R22.5	18PR	16.0	9.00	3350/3075	150/147	L	900
295/75R22.5	16PR	15.0	9.00	3000/2725	146/143	L	830
295/80R22.5	18PR	15.5	9.00	3550/3250	152/149	L	900
315/80R22.5	20PR	15.0	9.00	4125/3750	157/154	L	900

\*This product cannot be used for lorries truck and buses.

## MT955



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Using low heat generation  
and high anti-wear  
formula design



Excellent water evacuation  
performance



Excellent grip  
performance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	15.5	9.00	3550/3250	152/149	L	930

\*This product cannot be used for lorries truck and buses.



## MS998



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION ON FIRST-CLASS HIGHWAY  
OR ROAD IN GOOD CONDITION



Widened tread design



Excellent loading  
capacity



Excellent water  
evacuation  
performance



Excellent anti  
-wear performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	18PR	17.0	8.25	3250/3000	149/146	L	930
12R22.5	18PR	18.0	9.00	3550/3250	152/149	L	930
11.00R20	18PR	16.5	8.00	3550/3250	152/149	K	930
12.00R20	20PR	16.5	8.50	4000/3650	156/153	K	900
12.00R20	22PR	16.5	8.50	4000/3650	156/153	K	900
13R22.5	20PR	17.0	9.75	4000/3650	156/153	K	930
295/80R22.5	18PR	16.0	9.00	3550/3250	152/149	L	900
315/80R22.5	20PR	16.0	9.00	4125/3750	157/154	L	900
385/65R22.5	20PR	16.5	11.75	4500	160	K	900
385/65R22.5	24PR	16.5	11.75	5000	164	K	930

\*This product cannot be used for lorries truck and buses.

## MT805



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Evenly distributes grounding pressure,  
irregular wear resistance



Excellent heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	10.5	8.25	3000/2725	146/143	M	830

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	18PR	10.5	8.25	3250/3000	149/146	M	930
11R22.5	18PR	10.5	8.25	3250/3000	149/146	M	930

\*This product cannot be used for lorries truck and buses.



## MT901



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance and anti-wear formula design



Excellent water evacuation performance



Low heat generation

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
285/75R24.5	16PR	14.5	8.25	3075/2800	147/144	L	830
295/80R22.5	18PR	15.5	9.00	3550/3250	152/149	L	900
315/80R22.5	20PR	14.5	9.00	4125/3750	157/154	K	900

\*This product cannot be used for lorries truck and buses.



## MT905



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance formula design



Excellent anti-clamping stone and self-cleaning performance



Low heat generation

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	15.0	8.25	3000/2725	146/143	M	830
11R22.5	18PR	15.0	8.25	3250/3000	149/146	L	830

\*This product cannot be used for lorries truck and buses.

## MA811



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Excellent anti-clamping stone and self-cleaning performance



Evenly distributes grounding pressure, irregular wear resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	15.0	8.25	3000/2725	146/143	M	830
11R22.5	18PR	15.0	8.25	3250/3000	149/146	L	830
11R24.5	16PR	15.0	8.25	3250/3000	149/146	M	830
295/75R22.5	16PR	15.0	9.00	3000/2725	146/143	L	830

\*This product cannot be used for lorries truck and buses.



## MA01




SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Anti-wear performance



Anti-clamping stone performance



Excellent grip performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
215/75R17.5	16PR	13.0	6.00	1750/1600	127/124	L	830
225/70R19.5	16PR	14.0	6.75	1900/1800	130/128	L	830
235/75R17.5	16PR	13.0	6.75	2000/1850	132/129	L	830

\*This product cannot be used for lorries truck and buses.




## MD827




SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good loading performance



Excellent durability



Good irregular wear resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	20.5	9.00	3550/3250	152/149	L	930


\*This product cannot be used for lorries truck and buses.




## MT967



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance and anti-wear formula design



Excellent water evacuation performance



Irregular wear resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	14.5	9.00	3550/3250	152/149	M	900
315/80R22.5	20PR	14.0	9.00	4125/3750	157/154	L	900

\*This product cannot be used for lorries truck and buses.




## MD826



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Widened tread design



Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	21.0	9.00	3550/3250	152/149	K	930

\*This product cannot be used for lorries truck and buses.



## MD398



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good puncture resistance

Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	23.0	8.25	3000/2725	146/143	L	830
11R22.5	18PR	23.0	8.25	3250/3000	149/146	L	930
11R24.5	16PR	23.0	8.25	3250/3000	149/146	K	830
295/75R22.5	16PR	23.0	9.00	3000/2725	146/143	K	830


\*This product cannot be used for lorries truck and buses.



## MD803



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	20.5	8.25	3000/2725	146/143	M	830
11R22.5	18PR	20.5	8.25	3250/3000	149/146	M	930
11R24.5	16PR	20.5	8.25	3250/3000	149/146	M	830
295/75R22.5	16PR	20.0	9.00	3000/2725	146/143	L	830


\*This product cannot be used for lorries truck and buses.



## MD817



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good puncture resistance

Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	20.5	8.25	3000/2725	146/143	L	830
11R22.5	18PR	20.5	8.25	3250/3000	149/146	K	930
11R24.5	16PR	20.5	8.25	3250/3000	149/146	K	830

\*This product cannot be used for lorries truck and buses.



## MD919



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Long driving mileage

High saturation pattern design

Optimized tire grounding marks prevents irregular wear

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	19.5	9.00	3550/3250	152/149	M	900


\*This product cannot be used for lorries truck and buses.



## MD807



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low heat formula design



Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kPa)
295/80R22.5	18PR	18.5	9.00	3550/3250	152/149	K	900
315/80R22.5	20PR	20.5	9.00	4125/3750	157/154	K	900

\*This product cannot be used for lorries truck and buses.



## MD867



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Excellent resistance of groove cracking



Excellent anti-clamping stone and self-cleaning performance



Excellent durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
245/70R17.5	18PR	15.5	7.50	2120/2000	134/132	K	900
225/70R19.5	16PR	15.5	6.75	1900/1800	130/128	L	830
225/70R19.5	18PR	15.5	6.75	2000/1900	132/130	K	900
265/70R19.5	16PR	16.0	7.50	2500/2360	140/138	L	775
265/70R19.5	18PR	16.0	7.50	2725/2575	143/141	J	850
215/75R17.5	18PR	15.5	6.00	2180/2060	135/133	J	850
235/75R17.5	18PR	15.5	6.75	2725/2575	143/141	J	875
225/80R17.5	18PR	14.0	6.75	1550/1500	123/122	L	700
315/80R22.5	20PR	20.0	9.00	4125/3750	157/154	K	900


\*This product cannot be used for lorries truck and buses.



## MD909/MD909+/MD909++



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Widened tread design



Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kPa)
295/80R22.5	18PR	18.5	9.00	3550/3250	152/149	K	900
315/80R22.5	20PR	22.0	9.00	4125/3750	157/154	K	900

\*This product cannot be used for lorries truck and buses.



## MS979 /MS979X



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance and super anti-wear formula



Excellent water evacuation performance



Excellent distributes grounding pressure, good irregular wear resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kPa)
12R22.5	18PR	17.0	9.00	3550/3250	152/149	L	930


\*This product cannot be used for lorries truck and buses.



## MT917



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low heat formula design



Optimized groove bottom design



Strengthened bead design

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	16.5	9.00	3550/3250	152/149	L	900

\*This product cannot be used for lorries truck and buses.



## MA878



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Widened tread design



Excellent durability



High strength stiffness steel belt structure

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	17.5	9.00	3550/3250	152/149	L	930

\*This product cannot be used for lorries truck and buses.



## MA859



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Ultra-high mileage



Irregular wear resistance



Excellent durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	17.0	9.00	3550/3250	152/149	L	930

\*This product cannot be used for lorries truck and buses.



## MA866



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Ultra-high mileage



Irregular wear resistance



Excellent durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	17.0	9.00	3550/3250	152/149	L	930

\*This product cannot be used for lorries truck and buses.



## MA899



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	17.0	9.00	3550/3250	152/149	L	930

*\*This product cannot be used for lorries truck and buses.*



## MD828



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	20.5	9.00	3550/3250	152/149	L	930

*\*This product cannot be used for lorries truck and buses.*



## MT999



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	15.5	9.00	3550/3250	152/149	L	930

*\*This product cannot be used for lorries truck and buses.*



## MA809X



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	16.0	9.00	3550/3250	152/149	L	930

*\*This product cannot be used for lorries truck and buses.*



## MA819X



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	17.0	9.00	3550/3250	152/149	L	930

*\*This product cannot be used for lorries truck and buses.*

## MA515



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R24	20PR	14.5	8.50	4500/4125	160/157	K	900

*\*This product cannot be used for lorries truck and buses.*



## MA888



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	20.0	9.00	3550/3250	152/149	L	930

*\*This product cannot be used for lorries truck and buses.*

## MA516



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R24	20PR	14.5	8.50	4500/4125	160/157	K	900

*\*This product cannot be used for lorries truck and buses.*



## MA511



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	20PR	14.0	9.00	4125/3750	157/154	K	900

\*This product cannot be used for lorries truck and buses.



## MT610



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
385/65R22.5	20PR	14.5	11.75	4500	160	K	900

\*This product cannot be used for lorries truck and buses.




## MS611



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	20PR	14.0	9.00	4125/3750	157/154	L	900

\*This product cannot be used for lorries truck and buses.

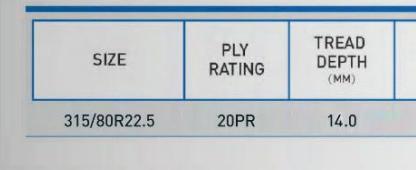

## MS996



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	22PR	16.0	9.00	4500/4125	160/157	K	930
315/70R22.5	20PR	16.0	9.00	3750/3450	154/151	L	930
385/65R22.5	24PR	16.5	11.75	5000	164	K	930

\*This product cannot be used for lorries truck and buses.

## MA513



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	20PR	14.0	9.00	4125/3750	157/154	K	900

\*This product cannot be used for lorries truck and buses.


# MA818/MA818A



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



High anti-wear formula design




Optimized bead design


# MT903



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



High mileage



Reinforced skeleton material design



Optimized tire grounding marks design prevents irregular wear

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
245/70R17.5	16PR	14.0	7.50	2000/1900	132/130	L	830
245/70R17.5	18PR	14.0	7.50	2120/2000	134/132	L	900
245/70R19.5	16PR	14.0	7.50	2180/2060	135/133	L	830


\*This product cannot be used for lorries truck and buses.

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	16.0	8.25	3000/2725	146/143	M	830
11R22.5	18PR	16.0	8.25	3250/3000	149/146	L	930
12R22.5	18PR	17.5	9.00	3550/3250	152/149	L	930
11.00R20	18PR	16.5	8.00	3550/3250	152/149	K	830
12.00R20	20PR	16.5	8.5	4000/3650	156/153	K	900
12.00R20	22PR	16.5	8.5	4000/3650	158/155	K	900
11R24.5	16PR	16.0	8.25	3250/3000	149/146	L	830
295/80R22.5	18PR	16.0	9.00	3550/3250	152/149	L	900
315/80R22.5	20PR	16.0	9.00	4125/3750	157/154	L	900
10.00R20	18PR	17.5	7.5	3250/3000	149/146	K	930
12.00R24	20PR	17.5	8.50	4500/4125	160/157	K	900
12.00R24	22PR	17.5	8.50	5000/4750	164/162	K	900
13R22.5	20PR	18.0	9.75	4000/3650	156/153	K	930
325/95R24	20PR	17.5	9.00	5000/4750	164/162	K	900

\*This product cannot be used for lorries truck and buses.



Excellent stone discharge performance



Good heat dissipation performance

# MA813



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
385/65R22.5	20PR	15.5	11.75	4500	160	L	900
385/65R22.5	24PR	15.5	11.75	5000	164	K	900

\*This product cannot be used for lorries truck and buses.



## MD829



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good durability

Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	25.0	9.00	3550/3250	152/149	L	930



*\*This product cannot be used for lorries truck and buses.*



## MA802



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Excellent durability

Strengthen the design of tire body and bead

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
10.00R20	18PR	16.0	7.50	3250/3000	149/146	K	930

*\*This product cannot be used for lorries truck and buses.*



## MA812/MA812A/MA812+



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good tread heat dissipation



Wide adaptability road surface



Strengthened body and bead design

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
10.00R20	18PR	16.0	7.50	3250/3000	149/146	K	930
11.00R20	18PR	17.0	8.00	3550/3250	152/149	K	930
12.00R20	20PR	17.5	8.50	4000/3650	156/153	K	900
12.00R20	22PR	17.5	8.50	4000/3650	156/153	K	900
12.00R24	20PR	17.5	8.50	4500/4125	160/157	K	900
11R22.5	16PR	15.0	8.25	3000/2725	146/143	K	830
11R22.5	18PR	15.0	8.25	3250/3000	149/146	M	930
12R22.5	18PR	15.0	9.00	3550/3250	152/149	K	930
13R22.5	20PR	17.5	9.75	4000/3650	156/153	K	930
315/80R22.5	20PR	15.0	9.00	4125/3750	157/154	K	900
315/80R22.5	22PR	16.0	9.00	4500/4125	160/157	K	930

*\*This product cannot be used for lorries truck and buses.*




## MA816



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good durability



Good tear resistance of pattern groove

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	16.5	9.00	3550/3250	152/149	L	930

*\*This product cannot be used for lorries truck and buses.*



## MA801/MA801+



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Excellent durability



Wide adaptability of  
road surface



Anti-skid performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
10.00R20	18PR	16.0	7.50	3250/3000	149/146	K	930

\*This product cannot be used for lorries truck and buses.




## MD838



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good chunking resistance



Good loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	18.5	9.00	3550/3250	152/149	K	930

\*This product cannot be used for lorries truck and buses.



## MD327



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Good heat dissipation  
performance



Good durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
10.00R20	18PR	19.0	7.50	3250/3000	149/146	K	930

\*This product cannot be used for lorries truck and buses.



## MA898




SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Excellent grip



Excellent durability and loading performance



Good heat dissipation on shoulder

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	16.5	8.50	4000/3650	156/153	K	900
12.00R20	22PR	16.5	8.50	4000/3650	156/153	K	900


\*This product cannot be used for lorries truck and buses.



## MA823



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Ultra-long mileage



Anti-clamping stone design



Excellent durability and loading performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R24	20PR	17.5	8.50	4500/4125	160/157	K	900

\*This product cannot be used for lorries truck and buses.




## MA868/MA868+


SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Excellent durability and loading performance



Anti-skid performance



Wide adaptability of road surface

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11.00R20	18PR	16.5	8.00	3550/3250	152/149	K	930
12.00R20	20PR	17.0	8.50	4000/3650	156/153	K	900
12.00R20	22PR	17.0	8.50	4000/3650	156/153	K	900

\*This product cannot be used for lorries truck and buses.



## MT970




SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Excellent wear resistance



Low fuel consumption



Low heat of tread formula

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
385/65R22.5	20PR	16.7	11.75	4500	160	K	900
385/65R22.5	24PR	16.7	11.75	5000	164	K	900
385/55R22.5	20PR	16.5	12.25	4500	160	K	900

\*This product cannot be used for lorries truck and buses.



## MD309



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good puncture resistance



Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	23.0	8.25	3250/3000	146/143	L	930
11R22.5	18PR	23.0	8.25	3250/3000	149/146	K	930
11R24.5	16PR	23.0	8.25	3250/3000	149/146	K	830

\*This product cannot be used for lorries truck and buses.



## MD368



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Excellent self-cleaning performance



Groove bottom crack resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	22.0	8.25	3000/2725	146/143	L	830
11R22.5	18PR	22.0	8.25	3250/3000	149/146	L	930


\*This product cannot be used for lorries truck and buses.



## MD939



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good heat dissipation performance on shoulder

Excellent grip

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	18.0	9.00	3550/3250	152/149	L	900

*\*This product cannot be used for lorries truck and buses.*



## MD959



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	22PR	21.0	9.00	4500/4125	160/157	K	930
315/70R22.5	20PR	21.0	9.00	3750/3450	154/151	L	930

*\*This product cannot be used for lorries truck and buses.*



## MD308



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF ROUGH ROADS



Excellent durability



Low heat formula

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	20PR	20.5	9.00	4125/3750	157/154	K	900

*\*This product cannot be used for lorries truck and buses.*



## MD338



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Tread puncture resistance



Tear resistance of pattern groove

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	20PR	18.5	9.00	4125/3750	157/154	K	900


*\*This product cannot be used for lorries truck and buses.*




## MD929



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Widened tread design



Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	20PR	22.0	9.00	4125/3750	157/154	K	900
295/80R22.5	18PR	22.0	9.00	3550/3250	152/149	K	900

\*This product cannot be used for lorries truck and buses.



## MD376



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Excellent durability and loading performance



Anti-skid performance



Good heat dissipation on shoulder

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11.00R20	18PR	20.0	8.00	3550/3250	152/149	K	930


\*This product cannot be used for lorries truck and buses.




## MD806



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Small stone retention amount



Ground stress evenly distributed



High strength framework material

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R24.5	16PR	19.5	8.25	3250/3000	149/146	L	830
285/75R24.5	16PR	19.5	8.25	3075/2800	147/144	L	830
295/75R22.5	16PR	19.5	9.00	3000/2725	146/143	L	830


\*This product cannot be used for lorries truck and buses.



## MD316



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Tear resistance performance



Good heat dissipation performance on shoulder

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R24	20PR	20.0	8.50	4500/4125	160/157	J	900


\*This product cannot be used for lorries truck and buses.



## MD306




SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Low heat rubber formula design



Excellent grip, anti-skid performance



Good loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
10.00R20	18PR	19.5	7.50	3250/3000	149/146	K	930

\*This product cannot be used for lorries truck and buses.



## MA315



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Good tread heat dissipation



Good adaptability of road conditions



Zigzag pattern design, provides good water  
evacuation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
13R22.5	20PR	16.5	9.75	4000/3650	156/153	K	930

\*This product cannot be used for lorries truck and buses.



## MD307



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Excellent durability and loading performance



Anti-clamping stone performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
10.00R20	18PR	19.0	7.50	3250/3000	149/146	K	930


\*This product cannot be used for lorries truck and buses.



## MD312



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Good heat dissipation on shoulder



Strengthen the design of tire body and bead

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11.00R20	18PR	20.0	8.00	3550/3250	152/149	K	930

\*This product cannot be used for lorries truck and buses.



## MD305



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
425/65R22.5	22PR	18.0	12.25	5300	166	K	900

\*This product cannot be used for lorries truck and buses.




## MD318



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF ROUGH ROADS



Puncture resistance performance



Deepened pattern groove design

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	24.0	9.00	3550/3250	152/149	K	900

\*This product cannot be used for lorries truck and buses.



## MD357



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Puncture resistance performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	23.0	8.25	3000/2725	146/143	G	830
11R22.5	18PR	23.0	8.25	3250/3000	149/146	G	930
11R24.5	16PR	21.0	8.25	3250/3000	149/146	G	830


\*This product cannot be used for lorries truck and buses.



## MD358



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF ROUGH ROADS



Low heat and anti-wear formula



Excellent durability, loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	22.0	8.25	3000/2725	146/143	L	830
11R22.5	18PR	22.0	8.25	3250/3000	149/146	L	930

\*This product cannot be used for lorries truck and buses.



## MD317



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Good heat dissipation performance



Good durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
10.00R20	18PR	19.0	7.50	3250/3000	149/146	K	930

\*This product cannot be used for lorries truck and buses.



## MD767/MD767+

SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF MIXED ROADS



Excellent durability, loading performance



Tear resistance pattern groove

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	20.5	9.00	3550/3250	152/149	D	930


\*This product cannot be used for lorries truck and buses.



## MD359



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Excellent tear resistance performance



Excellent loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	18.5	8.50	4000/3650	156/153	K	900
12.00R20	22PR	18.5	8.50	4000/3650	156/153	K	900

\*This product cannot be used for lorries truck and buses.



## MD369/MD369+

SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Anti-clamping stone design



Excellent durability and loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	19.0	8.50	4000/3650	156/153	K	900
12.00R20	22PR	19.0	8.50	4000/3650	156/153	K	900

\*This product cannot be used for lorries truck and buses.



## MD319/MD319+

SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Excellent loading performance



Anti-clamping stone performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
13R22.5	20PR	21.0	9.75	4000/3650	156/153	K	930
11.00R20	18PR	20.0	8.00	3550/3250	152/149	K	930
12.00R20	20PR	21.0	8.50	4000/3650	156/153	K	900
12.00R20	22PR	21.0	8.50	4000/3650	158/155	K	900


\*This product cannot be used for lorries truck and buses.



## MD329+



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Excellent durability and loading  
performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	19.5	8.50	4000/3650	156/153	K	900
12.00R20	22PR	19.5	8.50	4000/3650	156/153	K	900

\*This product cannot be used for lorries truck and buses.



## MD837




SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF MIXED ROADS



Tear resistance pattern groove



Crown explosion-proof  
performance



Excellent durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	20.5	9.00	3550/3250	152/149	K	930

\*This product cannot be used for lorries truck and buses.


## MD339+




SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Excellent durability of crown



Excellent tear resistance



Good loading performance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	18.5	8.50	4000/3650	156/153	K	900
12.00R20	22PR	18.5	8.50	4000/3650	156/153	K	900


\*This product cannot be used for lorries truck and buses.




## MD737



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON ROUGH ROADS TRANSPORTATION



Excellent puncture resistance



Excellent loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
10.00R20	18PR	23.0	7.50	3250/3000	149/146	D	930
12.00R20	20PR	24.0	8.50	4000/3650	156/153	G	900
12.00R20	22PR	24.0	8.50	4250/3875	158/155	G	900

\*This product cannot be used for lorries truck and buses.



## MD717



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON ROUGH ROADS TRANSPORTATION



Excellent puncture resistance, cut and chip  
resistance



Excellent loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11.00R20	18PR	24.0	8.00	3550/3250	152/149	D	930
12.00R20	20PR	25.0	8.50	4000/3650	156/153	D	900
12.00R20	22PR	25.0	8.50	4000/3650	156/153	D	900

\*This product cannot be used for lorries truck and buses.



## MD757



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON ROUGH ROADS TRANSPORTATION



Excellent puncture resistance



Excellent loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	23.0	8.50	4000/3650	156/153	G	900
12.00R20	22PR	23.0	8.50	4000/3650	156/153	G	900
13R22.5	20PR	23.0	9.75	4000/3650	156/153	G	930

\*This product cannot be used for lorries truck and buses.



## MD707



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON ROUGH ROADS TRANSPORTATION



Excellent puncture resistance,  
cutting resistance



Excellent loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	24.5	8.50	4000/3650	156/153	D	900
12.00R20	22PR	24.5	8.50	4000/3650	156/153	D	900


\*This product cannot be used for lorries truck and buses.




## MD727



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON ROUGH ROADS TRANSPORTATION



Excellent cutting resistance,explosion-proof performance



Excellent loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11.00R20	18PR	24.0	8.00	3550/3250	152/149	D	930
12.00R20	20PR	26.0	8.50	4000/3650	156/153	D	900
12.00R20	22PR	26.0	8.50	4000/3650	158/155	F	900


\*This product cannot be used for lorries truck and buses.




## MD777



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON ROUGH ROADS TRANSPORTATION



Excellent cutting resistance,explosion-proof performance



Excellent loading performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11.00R20	18PR	24.0	8.00	3550/3250	152/149	D	930
12.00R20	20PR	26.0	8.50	4000/3650	156/153	D	900
12R22.5	18PR	23.5	9.00	3550/3250	152/149	L	930

\*This product cannot be used for lorries truck and buses.


## MD787



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON ROUGH ROADS TRANSPORTATION



Excellent cutting resistance,explosion-proof performance



Excellent loading performance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	26.0	8.50	4000/3650	156/153	D	900
12.00R20	22PR	26.0	8.50	4000/3650	158/155	F	900




\*This product cannot be used for lorries truck and buses.



## MD377S



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON WET ROAD TRANSPORTATION



3D sipe design

Excellent skid resistance

Special snow tread formula design

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	18PR	21.0	8.25	3250/3000	149/146	K	930
11R24.5	16PR	21.0	8.25	3250/3000	149/146	K	830
295/75R22.5	16PR	23.0	9.00	3000/2725	146/143	K	830

\*This product cannot be used for lorries truck and buses.



## MD336



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON WET ROAD TRANSPORTATION


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	25.0	8.25	3000/2725	146/143	K	830
11R22.5	18PR	25.0	8.25	3250/3000	149/146	K	930
11R24.5	16PR	25.0	8.25	3250/3000	149/146	K	830

\*This product cannot be used for lorries truck and buses.


## MD378S




SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON WET ROAD TRANSPORTATION



3D sipe design



Excellent skid resistance



Special snow tread formula design



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	21.0	8.25	3000/2725	146/143	K	830
11R22.5	18PR	21.0	8.25	3250/3000	149/146	K	930
11R24.5	16PR	21.0	8.25	3250/3000	149/146	K	830
295/75R22.5	16PR	23.0	9.00	3000/2725	146/143	K	830


\*This product cannot be used for lorries truck and buses.




## MDA01



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



3D sipe sheet design improves grip



Excellent durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	22.0	8.25	3000/2725	146/143	K	830
11R22.5	18PR	22.0	8.25	3250/3000	149/146	K	930
11R24.5	16PR	22.0	8.25	3250/3000	149/146	K	830

\*This product cannot be used for lorries truck and buses.



## MD388



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF MIXED ROADS



Super smooth driving surface design



Excellent durability and loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
295/80R22.5	18PR	21.0	9.00	3550/3250	152/149	K	900
295/80R22.5	20PR	21.0	9.00	3750/3450	154/151	G	930
315/80R22.5	20PR	22.0	9.00	4125/3750	157/154	K	900
315/80R22.5	22PR	22.0	9.00	4500/4125	160/157	K	930

\*This product cannot be used for lorries truck and buses.




## MD399



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Super smooth driving surface design



Excellent durability and loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12.00R20	20PR	23.0	8.5	4000/3650	156/153	G	900
12.00R20	22PR	23.0	8.5	4250/3875	158/155	G	970
12R22.5	18PR	24.0	9.00	3550/3250	152/149	J	930
12R22.5	18PR	24.0	9.00	3550/3250	152/149	D	930
295/80R22.5	18PR	22.0	9.00	3550/3250	152/149	J	900
295/80R22.5	20PR	22.0	9.00	3750/3450	154/151	G	930
315/80R22.5	20PR	22.0	9.00	4125/3750	157/154	K	900
315/80R22.5	22PR	22.0	9.00	4500/4125	160/157	G	930

\*This product cannot be used for lorries truck and buses.




## MD666



SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD  
AND MIXED ROAD



Anti-clamping stone performance



Excellent loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	20.0	9.00	3550/3250	152/149	K	930

\*This product cannot be used for lorries truck and buses.



## MDA02




SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



3D siping design improves grip



Excellent handling performance



Excellent durability



## MDA05




SUITABLE FOR ONLY TRAILER OR SEMI-TRAILER  
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



3D siping design improves grip



Excellent handling performance



Excellent durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R24.5	16PR	22.5	8.25	3250/3000	149/146	K	830

*\*This product cannot be used for lorries truck and buses.*

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
225/70R19.5	14PR	16.0	6.75	1800/1700	128/126	M	760
225/70R19.5	16PR	16.0	6.75	1900/1800	130/128	L	830
225/70R19.5	18PR	16.0	6.75	2000/1900	132/130	K	900

*\*This product cannot be used for lorries truck and buses.*